



**Self-Bonding**  
Liquid Silicone Elastomers



# Self-Bonding Liquid Silicone Elastomers

Advances in adhesion technology can help improve the bond between dissimilar materials, reduce assembly steps and successfully meet complex design requirements. The demands of soft-hard design have driven the growth of multi-component processes, that require good adhesion performance between different substrates.

Silicone elastomers and thermoplastics are widely used for soft-hard design via 2K molding or insert molding processes in applications ranging from consumer electronics and health care to packaging, automotive and industrial use. In these applications, unique performance characteristics such as waterproofing, durability and enhanced protection all require good adhesion performance.

Despite advances in adhesion technology, many available substrates still have adhesion challenges. A primer or pre-treatment on the surface of the substrate currently is required to achieve the desired adhesion performance between silicone elastomers and selective thermoplastics. With some plastics, such as polycarbonate (PC), the adhesion requirement is difficult to meet even when primer is applied.

Momentive offers a solution to this ongoing design challenge. Momentive's Silopren® LSR 27x9 liquid silicone rubber series is a strong self-bonding product portfolio serving the market needs on a wide range of thermoplastics e.g. polycarbonate (PC), polybutyleneterephthalate (PBT) and copolyesters.

The new Silopren LSR27x9 series for PC, PBT and copolyesters enlarges Momentive's Self-Bonding LSR portfolio and enables soft-hard design freedom for its customers.

## Key Features and Typical Benefits

- Primerless adhesion to various substrates
- Self-bonding properties to thermoplastics including PC, PBT and copolyesters
- Typically no primer needed
- Typically no special treatment on substrates' surface needed
- Typically no adhesion to the mold
- Excellent aging stability and weathering resistance
- Good physical properties
- Low temperature cure possible
- Fast cure for high productivity processes
- Improved productivity in integrated multi-component molding process by eliminating the need for assembling
- In compliance with FDA

## Potential Applications:

Silopren LSR 27x9 liquid silicone rubber can be considered for manufacturing articles where plastics and elastomers need to be combined in an overmolding or insert-molding process. Parts made by Silopren LSR 27x9 liquid silicone rubber are excellent candidates for use in various applications without post-curing. Examples include


- Sealing elements
- Gasket
- Membranes
- Vibration damper
- Spatula
- Handle
- Respiratory devices
- Other soft-hard combinations




\*Silopren is a trademark of Momentive Performance Materials Inc.

## Test of Adhesion Strength

1. Test specimen by insert molding

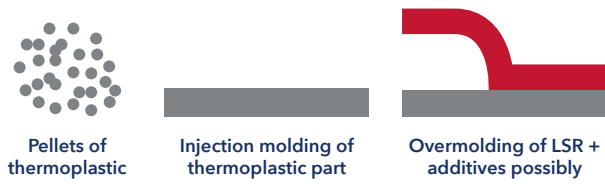


2. Test of adhesion strength by peeling test

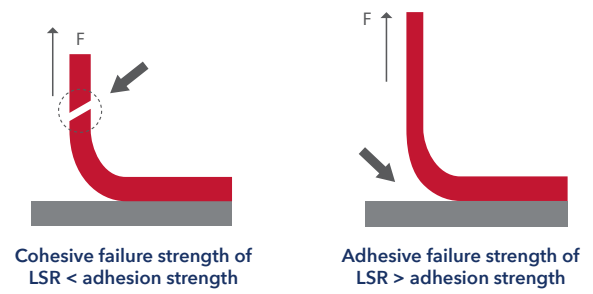

## Evaluation of Adhesion Strength

Peeling Force N/mm

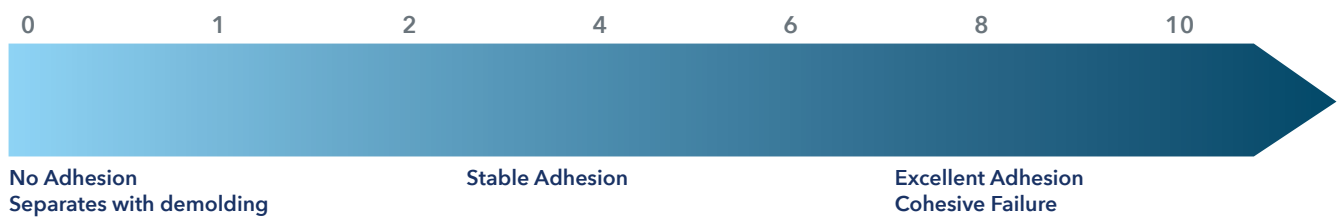


## Adhesion Performance:

Test of Silopren\* LSR 27x9 Liquid Silicone Rubber and Selective Substrates<sup>1</sup>

Peeling Force Avg. (N/mm)

24 h at RT (Room Temperature)

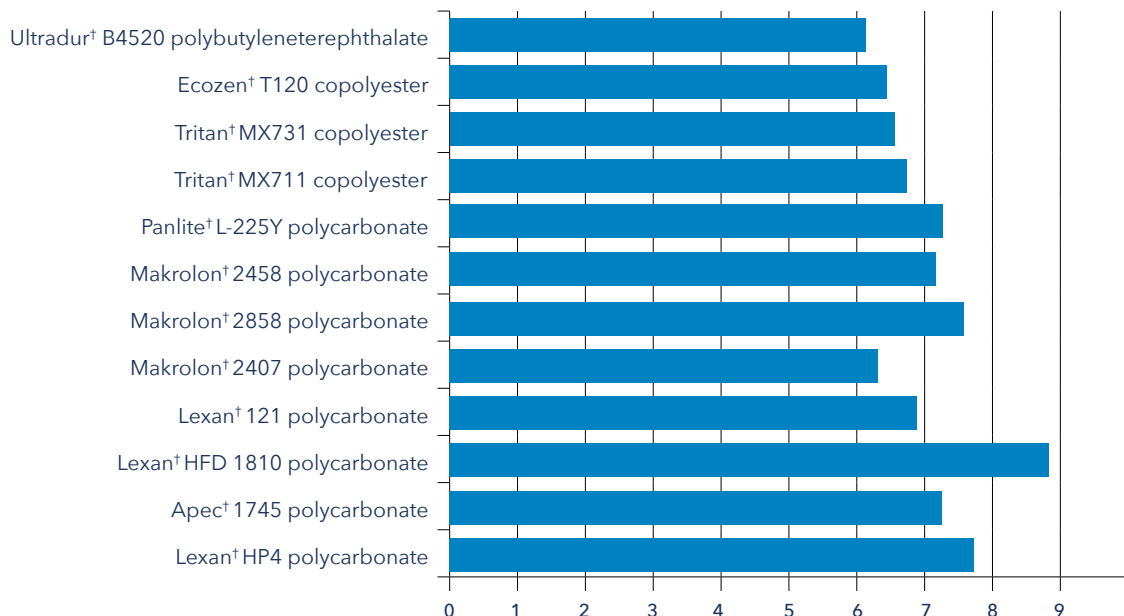

■ Peeling Force Avg. (N/mm)  
24 h at RT

Note: Test data. Actual results may vary.

Test specimen molded with injection molding and subjected to an additional storage for 24 h at RT. Molding conditions: 100 sec at 130 °C.

<sup>1</sup> In accordance to DIN 53289.

<sup>†</sup>Trademarks of their respective owners.

\*Silopren is a trademark of Momentive Performance Materials Inc.

# Adhesion Performance:

Test of Silopren\* LSR 27x9 Liquid Silicone Rubber and Selective Substrates<sup>1</sup>

Engineering Thermoplastics	Suppliers	Peeling Force (N/mm) 24h/RT	Peeling Force (N/mm) 4h/100 °C
Lexan <sup>†</sup> HP4 polycarbonate	Sabic Innovative Plastics	7,7	8,8
Lexan <sup>†</sup> HFD 1810 polycarbonate	Sabic Innovative Plastics	8,7	8,9
Lexan <sup>†</sup> 121 polycarbonate	Sabic Innovative Plastics	6,4	9,7
Apec <sup>†</sup> 1745 polycarbonate	Covestro AG	7,2	9,0
Makrolon <sup>†</sup> 2407 polycarbonate	Covestro AG	6,3	9,4
Makrolon <sup>†</sup> 2858 polycarbonate	Covestro AG	7,3	9,8
Makrolon <sup>†</sup> 2458 polycarbonate	Covestro AG	7,2	9,3
Panlite <sup>†</sup> L-1225Y polycarbonate	Teijin Limited	7,3	8,8
Tritan <sup>†</sup> MX711 copolyester	Eastman Chemical Company	6,7	9,4
Tritan <sup>†</sup> MX731 copolyester	Eastman Chemical Company	6,4	9,4
Ecozen <sup>†</sup> T120 copolyester	SK Chemicals	6,4	8,6
Ultradur <sup>†</sup> B4520 polybutyleneterephthalate	BASF AG	6,2	9,7

Note: Test data. Actual results may vary.  
<sup>†</sup>Trademarks of their respective owners.  
<sup>1</sup> In accordance to DIN 53289.



[www.momentive.com](http://www.momentive.com)

260 Hudson River Road,  
 Waterford, NY 12188 USA

## Customer Service Centers

Email: [commercial.services@momentive.com](mailto:commercial.services@momentive.com)

### Americas

+1 800 295 2392  
 +1 614 986 2495

### Europe, Middle East, Africa and India

00800 4321 1000  
 +40 213 044229

### Asia Pacific

**China**  
 800 820 0202  
 +86 21 3860 4892

**Japan**  
 0120 975 400  
 +81 276 20 6182

**All Other Countries**  
 +60 3 9206 1543

### Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

### Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

### Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

### DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

\*Silopren, Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.  
 Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.  
 Copyright 2018 Momentive Performance Materials Inc. All rights reserved.