


# MAGNASOFT\* TLC

## hydrophilic softener

SPECIALTY FLUIDS - TEXTILES & LEATHER

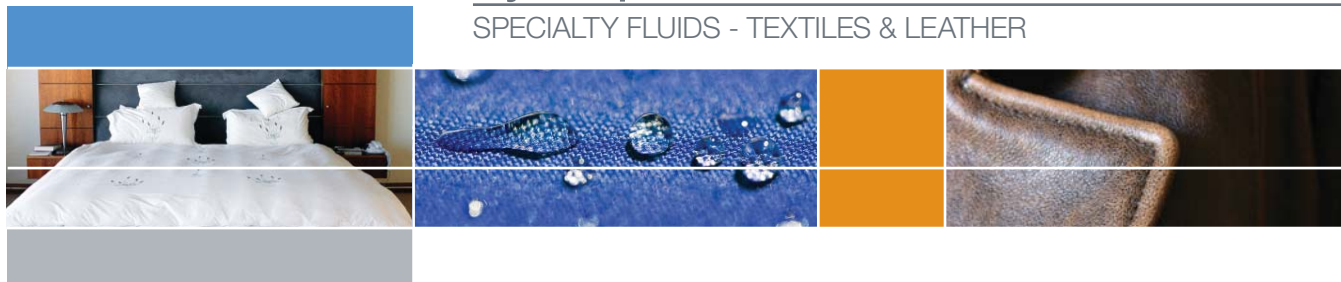

Magnasoft TLC softener is a water-soluble organommodified silicone fluid designed to impart softness and hydrophilicity to a variety of woven and nonwoven fabrics. Substrates to which Magnasoft TLC softener has been successfully applied are 100% synthetics, such as polyester, polypropylene, and polyethylene, as well as a variety of polyester/cotton blends.

Magnasoft TLC softener is nonionic in nature and, therefore, compatible with a broad range of other formulating components with which it might be used. In addition, Magnasoft TLC softener increases the tear strength and flex abrasion properties of certain fabrics.

Magnasoft TLC softener markedly improves the hydrophilicity of hydrophobic substrates and does not interfere with the wettability of hydrophilic substrates. With only limited durability, Magnasoft TLC softener is suggested primarily for single-use or limited-life products.

### Key Features and Typical Benefits

- water-soluble
- excellent hydrophilicity
- imparts good softening properties
- improves fabric strength
- shear-stable
- excellent compatibility with other formulating components
- economical

### Typical Physical Properties

Appearance	Clear Liquid
Percent Actives	100
Ionic Nature	Nonionic
Nominal Viscosity, cSt	425
Cloud Point, 1% solution, °C (°F)	48 (118)
Solvents	Water, Alcohol

# MAGNASOFT\* TLC hydrophilic softener

## Performance

### 100% Polyester Nonwoven [(1.3 oz/yd<sup>2</sup>) (44 g/m<sup>2</sup>)]

Pad Bath Formulation	Weight Percent	
	Magnasoft TLC softener	Water
Magnasoft TLC Softener	0.65	—
Water, distilled	99.35	100.0
Solids Pick-up, %	0.9	0.0
Dry/Cure Cycle at 340°F (170°C), min	1.5	1.5
<b>Performance</b>		
Softness <sup>(1)</sup>	1.0	5.0
Wettability <sup>(2)</sup> , sec	3.0	>300
Elmendorf Tear <sup>(3)</sup> , g	1020	635

(1) 1 = Softest, 5 = Harshesht

(2) AATCC 79-1980

(3) ASTM D1424-83

### Polyester/Cotton = 65/35 Woven Broadcloth [(3.0 oz/yd<sup>2</sup>) (102 g/m<sup>2</sup>)]

Pad Bath Formulation	Weight Percent	
	Magnasoft TLC softener	Water
Dp Resin (38%)	15.00	15.00
Resin Catalyst (64%)	2.25	2.25
Magnasoft TLC Softener	1.18	—
Water, distilled	81.57	82.75
Silicone Solids Pick-up, %	1.0	0.0
Dry/Cure Cycle at 340°F (170°C), min	1.5	1.5
<b>Performance</b>		
Softness <sup>(1)</sup>	1.0	5.0
Wettability <sup>(2)</sup> , sec	5.0	6.0

(1) 1 = Softest, 5 = Harshesht

(2) AATCC 79-1980

## MAGNASOFT\* TLC hydrophilic softener

### Performance (continued)

#### 100% Polyester Nonwoven [(0.7 oz/yd<sup>2</sup>) (24 g/m<sup>2</sup>)]

Pad Bath Formulation	Weight Percent	
	Magnasoft TLC softener	Water
Magnasoft TLC Softener	0.33	—
Water, distilled	99.67	100.0
Silicone Solids Pick-up, %	0.6	0.0
Dry/Cure Cycle at 245°F (118°C), min	1	1
<b>Performance</b>		
Softness <sup>(1)</sup>	1.0	5.0
Wettability <sup>(2)</sup> , sec	<1	>300

(1) 1 = Softest, 5 = Harshesht

(2) AATCC 79-1980

#### 100% Fused Polyester Nonwoven [(0.5 oz/yd<sup>2</sup>) (17 g/m<sup>2</sup>)]

Pad Bath Formulation	Weight Percent	
	Magnasoft TLC softener	Water
Magnasoft TLC Softener	0.5	—
Water, distilled	99.5	100.0
Silicone Solids Pick-up, %	0.9	0.0
Dry/Cure Cycle at 340°F (170°C), min	1.5	1.5
<b>Performance</b>		
Softness <sup>(1)</sup>	1.0	5.0
Wettability <sup>(2)</sup> , sec	Immediate Strike Through	>300
Elmendorf Tear <sup>(3)</sup> , g	1710	1040

(1) 1 = Softest, 5 = Harshesht

(2) AATCC 79-1980

(3) ASTM D1424-83

## MAGNASOFT\* TLC hydrophilic softener

### Performance (continued)

#### 100% Polyester Woven Fabric, Heat Set [(3.7 oz/yd<sup>2</sup>) (125 g/m<sup>2</sup>)]

Pad Bath Formulation	Weight Percent	
	Magnasoft TLC softener	Water
Magnasoft TLC Softener	1.18	—
Water, distilled	98.82	100.0
Silicone Solids Pick-up, %	1.0	0.0
Dry/Cure Cycle at 340°F (170°C), min	1.5	1.5
<b>Performance</b>		
Softness <sup>(1)</sup>	1.0	5.0
Wettability <sup>(2)</sup> , sec	5.0	>300
Elmendorf Tear <sup>(3)</sup> , g		
Warp	8000	6700
Fill 5000	4200	

(1) 1 = Softest, 5 = Harshesht

(2) AATCC 79-1980

(3) ASTM D1424-83

# MAGNASOFT\* TLC hydrophilic softener

## Kawabata Softness Evaluations

Softness may also be evaluated with Kawabata instrumentation and correlated to hand panel evaluations. The Kawabata Evaluation System (KES) is designed to measure the low deformation forces encountered when manipulating fabric for softness. The result of Kawabata evaluations on polypropylene nonwoven [(0.75 oz/yd<sup>2</sup>) (25.5 g/m<sup>2</sup>)] treated with 0.3 percent Magnasoft TLC add-on are listed in Table 1.

**Table 1: Evaluation of Low Deformation Forces by Kawabata Instrumentation for 100% Polypropylene Nonwoven [(0.75 oz/yd<sup>2</sup>) (25.5 g/m<sup>2</sup>)]**

Finish	Force		
	G	RC	RT
Untreated	7.6	62.1	54.6
Magnasoft TLC Softener	6.2	61.9	56.5

Where:

G = Shear rigidity (the larger the value, the more difficult to shear), g/cm•degree  
 RC = Compressional resilience (the larger the value, the better the recovery), %  
 RT = Tensile resilience (the larger the value, the better the recovery properties), %

Table 2 illustrates the correlation between Kawabata calculated data and hand panel evaluations for treated and untreated polypropylene substrates. The softness values are calculated according to the expression:

$$\text{Softness} = -194.3 + 11.5 (\ln [G]) + 2.8(\text{RC}) + 0.12(\text{RT}) \pm 0.46$$

**Table 2: Comparison of Kawabata and Hand Panel Softness Values<sup>(1)</sup> for 100% Polypropylene Nonwoven [(0.75 oz/yd<sup>2</sup>) (25.5 g/m<sup>2</sup>)]**

Finish	Hand Panel	Kawabata
Untreated	10.0	9.6
Magnasoft TLC Softener	6.5	6.8

(1) 1 = Softest, 10 = Harshes, 5 = Epoxy silicone standard

As the data show, the calculated values from the Kawabata evaluation are in good agreement with those obtained through a hand panel.

## MAGNASOFT\* TLC hydrophilic softener

### Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

### Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any Momentive Performance Materials representative. Use of other materials in conjunction with Momentive Performance Materials products may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

### Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

## MAGNASOFT\* TLC hydrophilic softener

### Emergency Service

---

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC) and CareChem24 International also maintain an around-the-clock emergency service for all chemical products:

<u>Location</u>	<u>Momentive Performance Materials Products</u>	<u>All Chemical Products</u>
Mainland U.S., Puerto Rico	518.233.2500	CHEMTREC: 800.424.9300
Alaska, Hawaii	518.233.2500	CHEMTREC: 800.424.9300
Canada	518.233.2500	CHEMTREC: 800.424.9300
Europe	+518.233.2500 (Albanian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Serbo-Croatian, Slovak, Spanish, Swedish, Turkish, Ukrainian)	+44.(0)208.762.8322 (UK)
Middle East, All countries, except Israel	+518.233.2500	+961.3.487.287 (Lebanon)
Middle East, Israel	+518.233.2500	+44.(0)208.762.8322 (UK)
Latin America, Asia/Pacific, all other locations worldwide	+518.233.2500	CHEMTREC: +1-703.527.3887 (collect)
At sea	Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials at 518.233.2500 or CHEMTREC at 800.424.9300.	

---

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

## CUSTOMER SERVICE CENTERS

---

North America	E cs-na.silicones@momentive.com		
	• Specialty Fluids	T +1.800.523.5862	F +1.304.746.1654
	• UA, Silanes and Specialty Coatings	T +1.800.334.4674	F +1.304.746.1623
	• RTVs and Elastomers	T +1.800.332.3390	F +1.304.746.1623
	• Consumer Sealants & Construction Sealants and Adhesives	T +1.877.943.7325	F +1.304.746.1654
<hr/>			
Latin America	E cs-la.silicones@momentive.com		
	• Argentina & Chile	T +54.11.4862.9544	F +54.11.4862.9544
	• Brazil	T +55.11.4534.9650	F +55.11.4534.9660
	• Mexico & Central America	T +52.55.2169.7670	F +52.55.2169.7699
	• Venezuela, Ecuador, Peru, Colombia & Caribbean	T +58.212.285.2149	F +58.212.285.2149
<hr/>			
Europe, Middle East, Africa and India	E cs-eur.silicones@momentive.com	T +00.800.4321.1000 T +40.21.3111848	
<hr/>			
Pacific	E cs-ap.silicones@momentive.com		
	• China	T +1.800.820.0202 or T +86.21.3860.4892	F +86.21.5079.3725
	• Japan	T +0120.975.400 or T +81.276.20.6182	F +81.276.31.6259
	• Korea	T +82.2.6201.4600	F +82.2.6201.4601
	• Malaysia	T +60.3.9206.1532	F +60.3.9206.1533
	• Thailand	T +662.207.3456	F +66.2207.3488
<hr/>			
Worldwide Hotline		T +1.607.786.8131 T +1.800.295.2392	F +1.607.786.8309

---

Visit us at [Momentive.com](http://Momentive.com)

---



Momentive Performance Materials  
22 Corporate Woods Boulevard  
Albany, NY 12211

\*Magnasoft is a trademark of Momentive Performance Materials Inc.  
Momentive is a trademark of Momentive Performance Materials Holdings LLC.  
Copyright 2003-2011 Momentive Performance Materials Inc. All rights reserved.

MOM-134-046-50E-GL 04/11 Printed in U.S.A.

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.