

SILCOOL™ TSE3280-G THERMALLY CONDUCTIVE SILICONE

Description

SILCOOL TSE3280-G silicone adhesive is a one component, medium viscosity, thermally conductive material, which cures to an elastomer when heat is applied. It is non-corrosive and has excellent adhesion properties to a wide variety of substrates without the need for using a primer.

Key Features and Typical Benefits

- Good thermal conductivity properties
- Adhesion to many substrates without the use of a primer
- One component formulation for ease of handling
- No cure by-products / low shrinkage allows for deep section application and use in enclosed assemblies
- Good dielectric properties

Typical Physical Properties (JIS K 6249)

Uncured Properties		TSE3280G
Colour		Grey
Viscosity	Pa·s	60
Cured Properties (cured 1 hour at 150°C)		
Density	g/cm ³	2.10
Hardness (Type A)		62
Tensile Strength	MPa	3.2
Elongation	%	110
Adhesion Strength	MPa	2.0
Dielectric Strength	kV/mm	21
Dielectric Constant (60Hz)		4.3
Dissipation Factor (60 Hz)		0.002
Volume Resistivity	Ω·cm	2.5 x 10 ¹⁴
Thermal Conductivity	W/m·K	0.88
Linear Expansion	1/K	1.5 x 10 ⁻⁴

Typical physical properties are average data and should not be used as or to develop product specifications.

Processing Recommendations

Compatibility

TSE3280-G silicone adhesive cures in contact with most clean and dry surfaces. However, certain materials, such as butyl and chlorinated rubber, sulfur-containing materials, amines and certain metal soap-cure RTV silicone rubber compounds, can cause cure inhibition. Cure inhibition is characterized by a gummy appearance of the RTV silicone

adhesive at the interface between it and the substrate.

It is recommended that a sample patch test be performed with TSE3280-G silicone adhesive to determine if a barrier coating or other inhibition-preventing measures are necessary before using the material.

Surface Preparation

The performance of any adhesive system is highly dependent upon surface preparation. In order to maximize the adhesion properties of TSE3280-G silicone adhesive and minimize the potential for cure inhibition, all parts should be as clean and dry as possible prior to the application of the silicone adhesive. Particular attention should be paid to those areas, which will come in direct contact with the adhesive during the curing process.

Bonding

TSE3280-G silicone adhesive generally offers very good adhesion to a wide variety of substrate materials without the use of a primer. For best adhesion, surfaces to be bonded should be thoroughly clean and dry. If a solvent is used to clean the substrates prior to use, steps must be taken to ensure the solvent has completely evaporated prior to application of the silicone rubber compound.

Curing


Since settling of the filler occurs during storage, TSE3280-G must be well stirred prior to use in the application. When TSE3280-G is hand mixed, or mixed with power mixing equipment, air entrapped during the mixing process should be removed to eliminate the formation of voids in the cured product.

TSE3280-G cures very rapidly when exposed to elevated temperatures. Typical cure times are as follows:

Cure Temp.	Cure Time
100°C	4 hours
125°C	2 hours
150°C	1 hour


The actual cure time will depend on the cross-sectional thickness, the thermal properties of the overall assembly, and type and efficiency of the oven.

ADHESION STRENGTH VS. TEMPERATURE

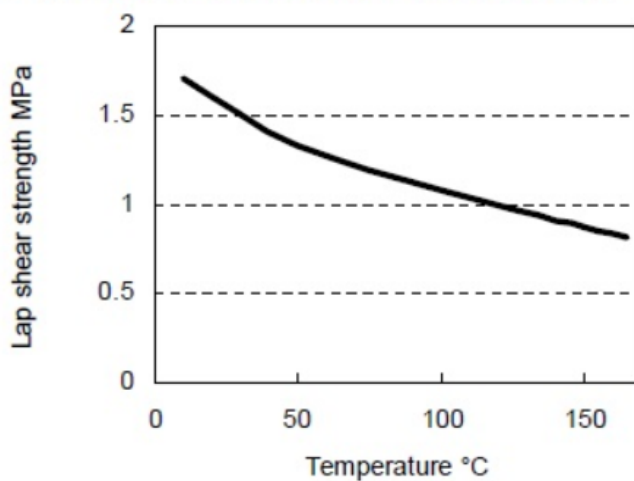


Substrate: Aluminum
 Thickness: 1 mm
 Cure condition: 1 h @ 150°C

CURE PROPERTIES

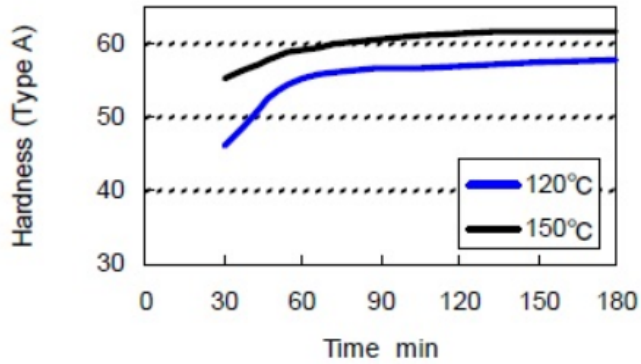


STORAGE STABILITY

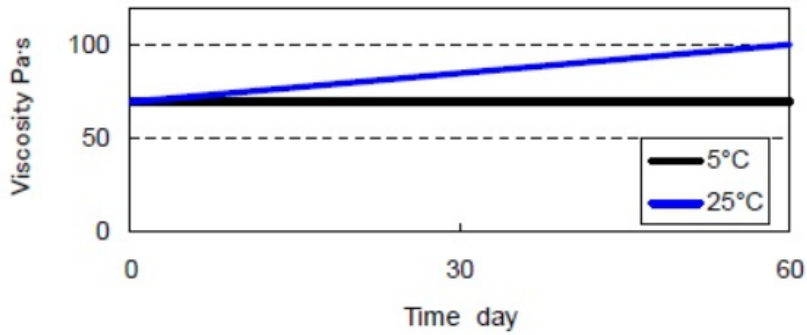


HEAT RESISTANCE (150°C)


HARDNESS

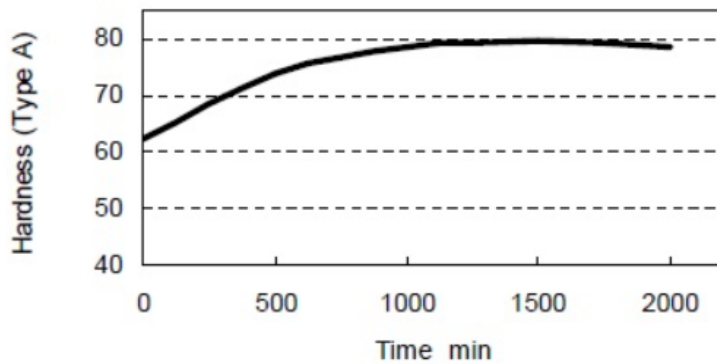

LAP SHEAR STRENGTH

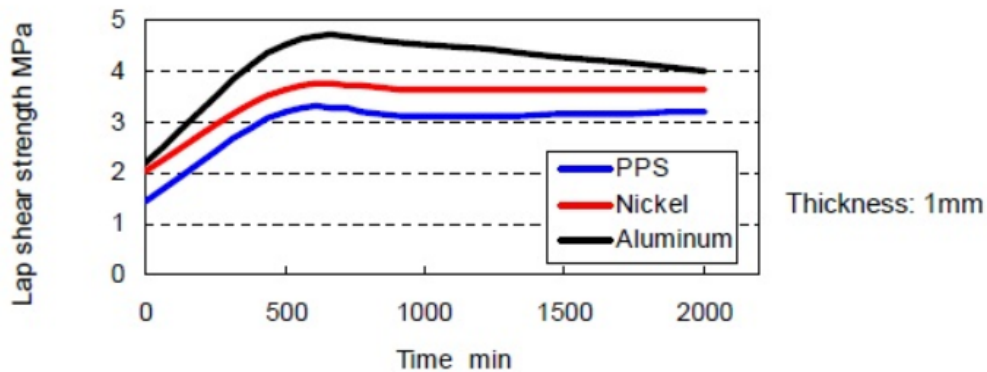

PRESSURE COOKER TEST

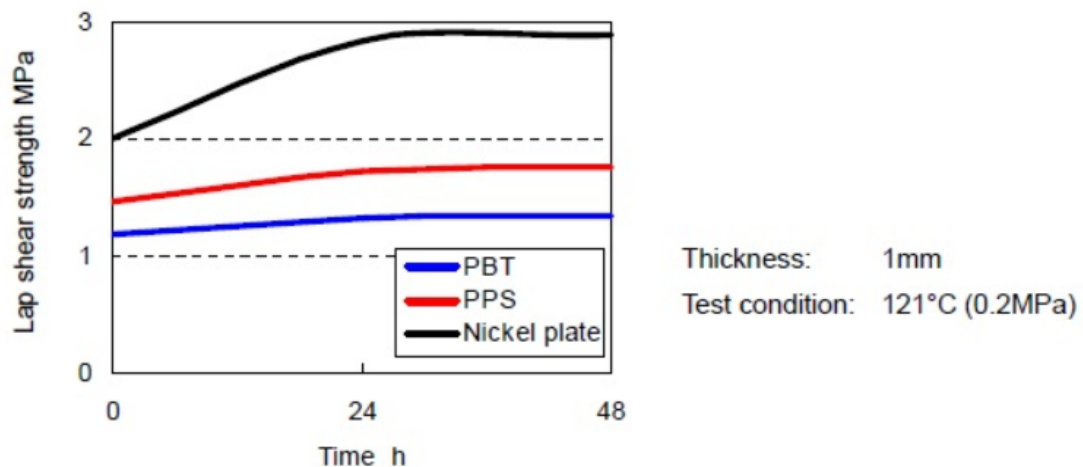

Availability

TSE3280-G is available in 200g tubes, 333ml cartridge, 2 cans and 25 kg drums.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at www.momentive.com or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the

safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Contact Information

Email

commercial.services@momentive.com

Telephone

Americas	Latin America	EMEA- Europe, Middle East, Africa & India	ASIA PACIFIC
+1 800 295 2392	Brazil	Europe	China
Toll free*	+55 11 4534 9650	+390510924300	800 820 0202
+704 805 6946	Direct Number	Direct number	Toll free
Direct Number			+86 21 3860 4892
			Direct number
*All American countries	Mexico	India, Middle East & Africa	Japan
	+52 55 2169 7670	+ 91 44 71212207	+81 3 5544 3111
	Direct Number	Direct number*	Direct number
		*All Middle Eastern countries, Africa, India,	Korea
			+82 2 6201 4600

For literature and technical assistance, visit our website at: www.momentive.com

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such

use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

The use of the "™" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.