

## SilForce™ SL6962 Solventless Coating

### Product Description

SilForce SL6962 thermal solventless release coating is an excellent candidate to consider for Glassine papers as well as for filmic liners. This polymer provides a flat release profile and fast cure at a low level of catalyst; e.g.: 40 ppm or even lower on Glassine paper under standard processing conditions. The low viscosity of this vinyl polymer can enable the reduction of silicone coat weight while maintaining good silicone coverage for stable release performance. This polymer can be considered for use on fast labelling dispensing machines that require a flat release profile in order to assure a smooth process at high line speed.

### Product References

SilForce SL6962 Base polymer

SilForce SL6031 Controlled Release Additive<sup>(1)</sup>

SilForce SL4380 Cross-linker for papers<sup>(2)</sup>

SilForce SL6210 Concentrated catalyst (PT)

(1) Other CRAs may be considered for this base polymer (please contact technical expert from Momentive for advice)

(2) Depending on the substrate and/or the processing conditions other cross-linker can be used

### Key Features and Typical Benefits

- Flat release profile (for fast dispensing labeling lines)
- New technology allowing low level of catalyst
- Versatile system for paper and filmic substrates (e.g. Glassine and BOPP)
- High formulation flexibility
- Enhanced cross-linkers for good anchorage of the release coating
- Potential productivity gain in terms of machine capacity & energy

### Potential Applications

SilForce SL6962 solventless coating is compositionally compliant with FDA regulations 21 CFR: 175.320 (Resinous and polymeric coatings for polyolefin films); 176.170 (Components of paper and paperboard in contact with aqueous and fatty foods); and 176.180 (components of paper and paperboard in contact with dry foods).

The end user has sole responsibility for determining that its product complies with all applicable FDA specifications and limitations and is fit for food contact use.


### Typical Physical Properties

Property	SilForce SL6962	SilForce SL6031
Viscosity, mPa•s, 25°C	100 - 160	1500 - 2700
Density, kg/l	0.99	1.04

Typical properties are average data and are not to be used as or develop specifications.

### Typical Release Profile

Finat #4 ageing @ RT for 24h  
Laminated with Tesa 7475

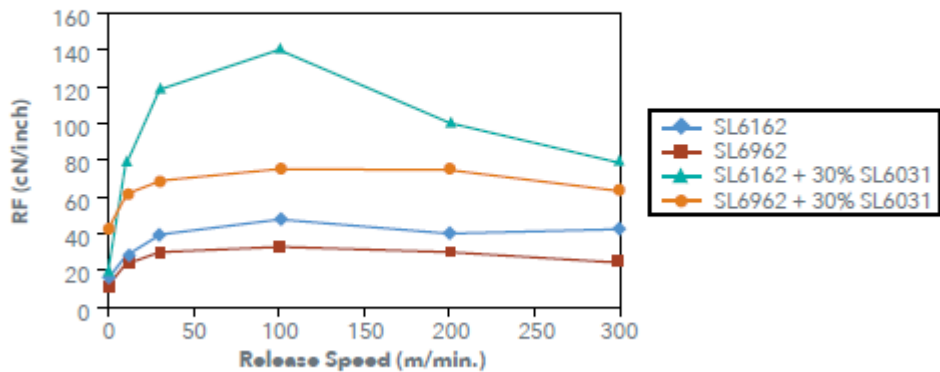

Note: Test data. Actual results may vary.

### General Considerations for Use

The solventless release coating system can be applied by many of the methods now being used commercially for solventless silicone. These include three roll differential offset gravure and various multiple smooth roll configurations. Heat should be applied immediately after coating to initiate cure. Best results are obtained with zoned ovens. Operating the first oven zone at 90-150 °C will allow the coating to level, forming a continuous film before cure is initiated. Subsequent oven zones should be sufficiently high in temperature to achieve the required web exit temperature. Actual temperatures required for complete cure will be highly dependent on the performance of the oven

and machine conditions. In general, minimum web temperature must be maintained for a finite time (= dwell time) to obtain complete cure, such time being dependent on oven length and the line speed.

**Typical starting formulations for glassine papers at a catalyst level of 40 ppm**

Component	0% CRA	10% CRA	20% CRA
SilForce SL6962	96	86	76
SilForce SL6031	-	10	20
SilForce SL4380	6.1	6.51	6.94
SilForce SL6210	4	4	4

**Important Note:**

The suggested starting formulation in the table is based on cure optimization. Destabilized (high) release may occur with some adhesives like self-cross-linkage solution acrylics and UV hot melt, at the suggested cross-linker levels. Please contact a Momentive Performance Materials Technical Service Representative for further information.

**Bath Life**

The working life of an activated bath will vary depending on ambient conditions. In general, the suggested formulation in the table will have a minimum bath life of 4 hours under normal processing conditions.

The thin film bath life of the SilForce SL6962 system is significantly shorter than the thin film bath life of the SilForce SL6600 and SilForce SL6625 systems, therefore we recommend to have a “proper cleaning” of the coating head if the machine is stopped for more than 20 minutes.

At high catalyst level (more than 80 ppm Platinum) bath life with the SL6962 system can be shorter.

**Bath Preparation**

To ensure consistent results and maximize bath life, components should be mixed in the following order:

1. Weigh and add SilForce SL6962 base polymer to a clean, rust-free container/mixing vessel
2. Weigh and add the Controlled Release Additive (CRA) (SilForce SL6031 CRA for example) if needed into the recipe
3. Agitate thoroughly
4. Weigh and add the cross-linker (SilForce SL4380 cross-linker) to the above material
5. Agitate thoroughly
6. Weigh and add the platinum concentrate (SilForce SL6210 concentrated catalyst) to above mix
7. Agitate thoroughly for 10-15 minutes to ensure homogeneity

Bath should be prepared just prior to use.

### **Coating Weight/Substrates**

The optimal coat weight will depend on the hold out of the surface, but generally 0.8-1.4 g/m<sup>2</sup> will provide a continuous silicone film.

Coat weights can be determined by X-Ray Fluorescence.

### **Current Available Packaging**

- 1 kg sample
- 18 kg pail
- 180 kg drum
- 950 kg tote

### **Patent Status**

여기에 포함된 어떠한 내용도 관련 특허가 없음을 의미하거나 특허 소유자의 허가 없이 특허에서 다루는 발명을 실행하기 위한 허가, 유도 또는 권고를 구성하는 것으로 해석되어서는 안됩니다.

### **Product Safety, Handling and Storage**

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-

the-clock emergency service for its products. SDS are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

**Limitations**

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

**Contact Information**

Email

[commercial.services@momentive.com](mailto:commercial.services@momentive.com)

**Telephone**

<b>Americas</b>	<b>Latin America</b>	<b>EMEAI- Europe, Middle East, Africa &amp; India</b>	<b>ASIA PACIFIC</b>
+1 800 295 2392	<b>Brazil</b>	<b>Europe</b>	<b>China</b>
Toll free*	+55 11 4534 9650	+390510924300	800 820 0202
+704 805 6946	Direct Number	Direct number	Toll free
Direct Number			+86 21 3860 4892
			Direct number
*All American countries	<b>Mexico</b>	<b>India, Middle East &amp; Africa</b>	<b>Japan</b>
	+52 55 2169 7670	+ 91 44 71212207	+81 3 5544 3111
	Direct Number	Direct number*	Direct number
		<b>*All Middle Eastern countries, Africa, India,</b>	<b>Korea</b>
			+82 2 6201 4600

For literature and technical assistance, visit our website at: [www.momentive.com](http://www.momentive.com)

**DISCLAIMER:**

**THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY “SUPPLIER”), ARE SOLD SUBJECT TO SUPPLIER’S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER’S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user bears full responsibility for making its own determination as to the suitability of Supplier’s materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier’s products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier’s standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

\*SilForce™는 Momentive Performance Materials Inc.의 상표입니다.

The use of the “™” symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.