

## Silquest™ A-1871

### Silquest\* A-1871

#### Description

Silquest A-1871 silane is an epoxy functional silane that may be used as an adhesion promoter in polysulfide, urethane, epoxy and acrylic caulks, sealants, adhesives and coatings.

#### Key Features and Benefits

Silquest A-1871 silane contains functional groups with two distinct reactivities; an epoxide capable of reacting with a variety of organic functionalities and alkoxy silane groups that can bond strongly to many inorganic substrates. This ability to chemically link select organic resins to inorganic substrates may offer improved wet and dry adhesion without the potential for yellowing that is present with amino functional adhesion promoters. The ability of silanol groups to self condense also offers the possibility of using Silquest A-1871 silane as a crosslinking agent in some resin systems.

The most significant difference between Silquest A-1871 silane and the familiar Silquest A-187\* silane is in the alkoxy substitution. Silquest A-1871 silane is ethoxy not methoxy substituted. This means Silquest A-1871 silane will generate ethanol upon hydrolysis instead of methanol, and under the same conditions will hydrolyze more slowly. The release of ethanol rather than methanol may prove useful when methanol emissions are a concern.

Possible benefits from the use of Silquest A-1871 epoxy silane may include:

- Improved substrate adhesion in many waterborne acrylic and vinyl-acrylic caulks, adhesives and coatings. Use of epoxy silane may avoid the yellowing sometimes seen

when amino functional adhesion promoters are used.

- Crosslinking of waterborne latexes and dispersions; acrylic, styrene acrylic or other copolymers, polyurethane or epoxy dispersions, may provide outstanding chemical resistance and mechanical properties to coatings, adhesives or sealants.
- Enhanced adhesion to glass and metal substrates in polyurethane resins, often providing improved shelf stability over aminosilane alternatives.
- Enhanced electrical properties of epoxy based electronic encapsulants and packaging materials, resulting from improved bonding between resin and substrate or filler. Improved wet adhesion reduces the risk of semiconductor or integrated circuit failure as a result of water ingress or surface corrosion.
- Improved wet and dry adhesion, tensile strength and water resistance of quartz-filled epoxy encapsulants, sand-filled epoxy concrete repair materials, and metal-filled epoxy resins for mold die tools.
- Improved adhesion to glass and metal substrates for epoxy, polysulfide, urethane and acrylic-based adhesives, sealants and caulks.


### Typical Physical Properties

Silquest A-1871 Epoxy Silane	
CAS Number	2602-34-8
Appearance	Clear, pale
Molecular Weight	278.42
Specific Gravity at 25/25°C	1.0034
Refractive Index nD 25°C	1.426
Flash Point, Tag Closed Cup, °C (°F)	118 (245)
Boiling Point, °C (°F)	304 (579)

### Solubility

Silquest A-1871 silane is soluble in water after hydrolysis, and also in alcohol, acetone and aliphatic esters such as methyl acetate at normal application levels under five percent. Hydrolysis releases ethanol.

### Chemical Structure

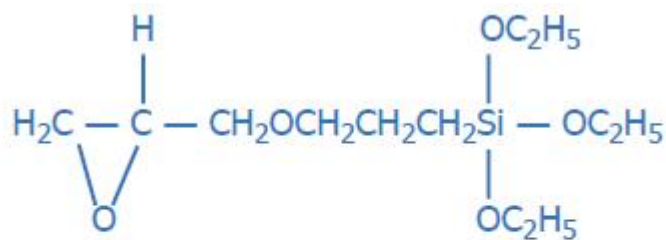

Gamma – Glycidoxypropyltriethoxysilane

### Patent Status

여기에 포함된 어떠한 내용도 관련 특허가 없음을 의미하거나 특허 소유자의 허가 없이 특허에서 다루는 발명을 실행하기 위한 허가, 유도 또는 권고를 구성하는 것으로 해석되어서는 안 됩니다.

### Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

### Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

### Contact Information

Email

[commercial.services@momentive.com](mailto:commercial.services@momentive.com)

**Telephone**

<b>Americas</b>	<b>Latin America</b>	<b>EMEAI- Europe, Middle East, Africa &amp; India</b>	<b>ASIA PACIFIC</b>
+1 800 295 2392 Toll free* +704 805 6946 Direct Number	<b>Brazil</b> +55 11 4534 9650 Direct Number	<b>Europe</b> +390510924300 Direct number	<b>China</b> 800 820 0202 Toll free +86 21 3860 4892 Direct number
*All American countries	<b>Mexico</b> +52 55 2169 7670 Direct Number	<b>India, Middle East &amp; Africa</b> + 91 44 71212207 Direct number*	<b>Japan</b> +81 3 5544 3111 Direct number
		<b>*All Middle Eastern countries, Africa, India,</b>	<b>Korea</b> +82 2 6201 4600

For literature and technical assistance, visit our website at: [www.momentive.com](http://www.momentive.com)

**DISCLAIMER:**

**THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY “SUPPLIER”), ARE SOLD SUBJECT TO SUPPLIER’S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER’S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS**

**OR SERVICES DESCRIBED HEREIN.** Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

\*Silquest™는 Momentive Performance Materials Inc.의 상표입니다.

The use of the "™" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.